



Features:

- 15.6" TFT Full HD LCD, 300nits
- Slim edge bezel
- Type C USB Interface
- Aluminum housing design
- Integrated protection glass
- Hidden OSD control buttons
- Sleek surface throughout monitor's appearance
- Support portrait screen mode
- Optional MSR, iButton, fingerprint, 2D scanner, and RFID
- 75*75 VESA, Pole or Stand Available

Specification

PM7000			
		Standalone	2nd display
Display	Display Size		15.6" TFT LCD
	Touch Screen		PCAP (option)
	Optimal Resolution		1920 * 1080
	Brightness		350 cd/m ²
	Contrast Ratio		1000 : 1 (typ)
	Viewing Angle		85/ 85/ 85/ 85 degree (U/ D/ L/ R)
	Response Time		20 ms (typ)
I/O Connectors	USB Type-C		x 1 (for display only)
	USB 2.0		x 2 (rear x 1, side x 1)
	12V DC in		x 1 -
OSD Control		+ / - (brightness control)	
Power Supply		DC 12V 36W power adapter	-
Optional Peripherals		VFD/ 9.7" 2nd display/ MSR/ iButton/ Scanner/ Fingerprint/ RFID	MSR/ iButton/ Scanner/ iButton/ Scanner/ Fingerprint/ RFID
Temperature	Temperature	Operation	32° to 104° F (0° to 40° C)
		Storage	-4° to 140° F (-20° to 60° C)
	Relative Humidity		20% to 80% non-condensing
Approvals		CE/ FCC/ LVD	
Mounting		VESA mount (75 x 75 mm)	
Dimension (W x H x D) mm		365 x 220 x 310 mm	365 x 220 x 70 mm




Standalone Monitor




2nd display for PT2700, PT3200, PT2000 series, PT2600 series, and Ares series

Mechanical Layout / Drawing

Unit: mm

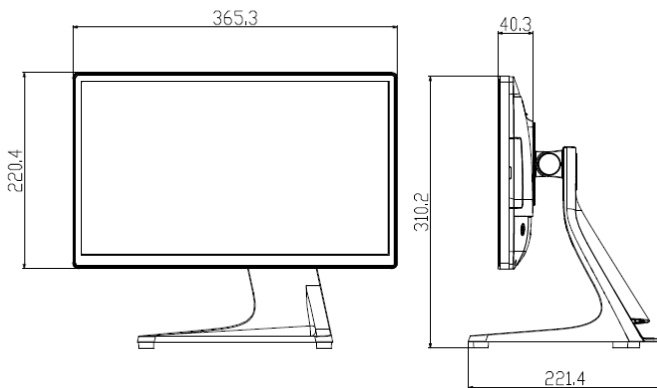

Standalone Monitor

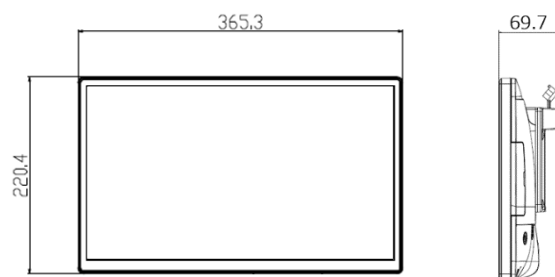

2nd display

I/O Drawing

