



Features:

- Slim edge bezel
- Type C USB Interface
- Aluminum housing design
- Integrated protection glass
- Hidden OSD control buttons
- Sleek surface throughout monitor's appearance
- Support portrait screen mode
- 75*75 VESA for Pole or Stand installation
- Standalone and POS 2nd display two application

Specification

PM5500				
			Standalone	2nd display
Display	Display Size		15" TFT LCD	
	Touch Screen		PCAP (option)	
	Optimal Resolution		1024 * 768	
	Brightness		350 cd/m²	
I/O Connectors	USB Type-C		x 1 (for display)	
	USB 2.0		x 1 (for touch)	
	12V DC in		x 1	-
OSD Control			+ / - (brightness control)	
Power Supply			12V@2A power adapter	-
Temperature	Temperature	Operation	32° to 104° F (0° to 40° C)	
	Relative Humidity		20% to 80% non-condensing	
Approvals			CE/ FCC/LVD	
Mounting			VESA mount (75 x 75 mm)	
Dimension (W x H x D) mm			347 x 271 x 296 (with stand)	




Standalone Monitor




2nd display for Ares550

Mechanical Layout / Drawing

Unit: mm

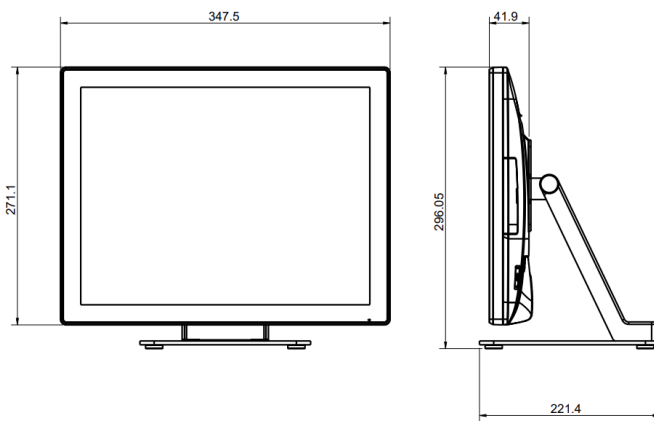

Standalone Monitor

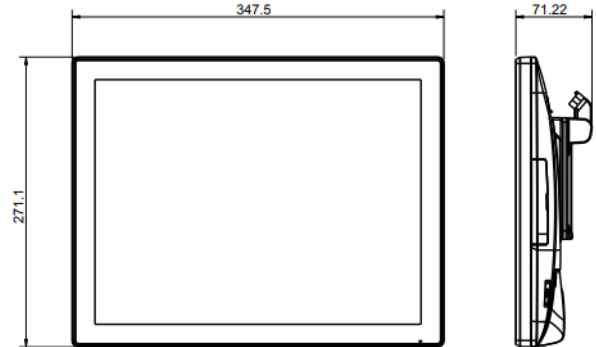

2nd display

I/O Drawing

