



Features

- 15" all-in-one panel PC style with bezel-free touch display
- Power efficient Intel® Bay Trail J1900 2.0GHz processor
- IP64 water & dust- proof front panel protection
- Easy access 2.5" HDD for installation and maintenance
- Power adapter embedded within base
- Optional VFD & 9.7" attached customer display
- Optional MSR & iButton integrated at the side of the touchscreen

Specification



Model		PT2000		
Display	Display Size	15" TFT LCD		
	Resolution	1024 X 768		
	Brightness / Color	300 cd/m ² , 16.7M colors		
	Backlight	LED		
Touch Panel	Type	Projected Capacitive touch		
Processor	CPU/ Chipset	Intel® Celeron J1900 Quad-Core 2.0Ghz		
Memory		X 1 SO-DIMM socket supports up to 8GB		
Storage		X 1 (2.5" SATAII HDD or SSD)		
I/O Connectors	USB 2.0	X 4 (Rear X 3, Side X 1)		
	USB 3.0	X 1 (Rear)		
	Powered COM (RS232)	X 2 (DB9 powered COM 5V/ 12V selected by jumper)		
	Cash Drawer Port	X 1 (24V RJ11 cash drawer port)		
	Audio Port	Line-out	X 1	
	LAN		x 1 (RJ45 10/100/1000 Base-T)	
	VGA		X 1 (DB15)	
	DC In		Lockable 3-pin DC input	
Optional Peripherals		VFD / 9.7" 2 nd display / MSR / iButton		
Power Supply		60W 19V lockable 3-pin power adapter		
OS Support		POSReady 7 / Win 10 IoT Enterprise		
Environment	Temperature	Operation	32° to 95° F (0° to 40° C)	
		Storage	-4° to 140° F (-20° to 60° C)	
	Relative Humidity	20% to 80% non-condensing		
Dimension (W x H x D) mm		364 x 339 x 229		
Certifications		CE / FCC / LVD		
Protection		IP64 on front bezel		

Specifications subject to change without notice.

PT2000

Economical POS Terminal



IP64 on front panel protection



Small footprint and compact design



Easy access 2.5" HDD




Optional VFD & 9.7" 2nd display, MSR, or iButton devices



Power adapter embedded within base
60W

Mechanical Layout / Drawing

Unit: mm

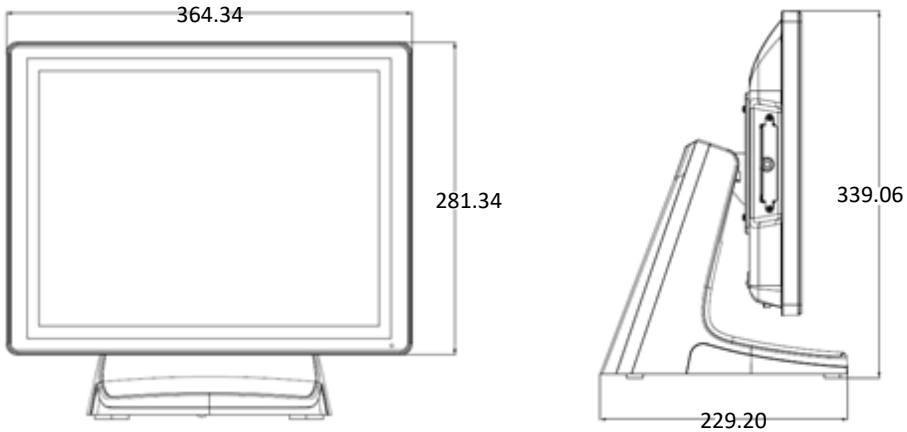

I/O Interface

